

# 304 G

Compact Wheel Loader



JOHN DEERE

**JESCO**  
THE DOWN-TO-EARTH EQUIPMENT PEOPLE™



## 304 G-TIER WHEEL LOADER SPECIFICATIONS

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Engine		304 G-TIER
Manufacturer and Model		Yanmar 4TN86CHT-M high power
Non-Road Emission Standard		EPA Final Tier 4 / EU Stage V
Cylinders		4
Valves per Cylinder		4
Displacement		2.1 L (128 cu. in.)
Net Peak Power at 2,200 rpm (SAE J1349 / ISO 9249)		53 kW (72 hp)
Gross Rated Power at 2,200 rpm (ISO 14396)		55 kW (74 hp)
Peak Torque at 1,690 rpm (SAE J1349 / ISO 9249)		274 Nm (372 lb.-ft.)
Engine Bore and Stroke		86 x 90 mm (3.39 x 3.54 in.)
Lubrication		Pressure system with full-flow spin-on filter
Aspiration		Turbocharged
Air Cleaner		Dual safety element dry type
Cooling		
Fan		Direct driven
Engine Coolant Rating		-37 deg. C (-34 deg. F)
Powertrain		
Type		Hydrostatic (HST) with infinitely variable speed control over full range of operating speeds; 2 speed ranges; joystick-mounted F-N-R; acceleration pedal; HST inching pedal, which allows infinitely reduced travel speeds while maintaining full engine rpm and hydraulic flow
2 Travel Speeds in Forward and Reverse (equipped with 405/70R20 tires)		
Gear 1		6.0 km/h (3.7 mph)
Gear 2		30.0 km/h (18.6 mph)
Axles		Rigid-mount front and rear axles with 10-deg. frame oscillation
Rear-Axle Versus Front-Axle Oscillation		20 deg. total, stop to stop
Differentials		45% locking front and rear differentials
Maximum Rise and Fall, Single Wheel		254 mm (10 in.)
Steering		Hydraulic power steering (SAE J1511); 40-deg. articulation left and right
Steering Wheel Turns, Stop to Stop		3.5 left to 4.5 right
Articulation Angle		80-deg. arc (40 deg. each direction)
Final Drive		Heavy-duty outboard planetary
Brakes (SAE J1473 / ISO 3450)		
Service Brakes		Hydraulically actuated, self-adjusting internal wet-disc brake and driveline drum brake
Parking Brake		Automatically spring-applied, hydraulically released, internal wet disc
Hydraulics		
Main Pump (loader and steering)		Fixed-displacement gear pump; open-center system
Maximum Rated Flow at 6895 kPa (1,000 psi)		80 L/m (21 gpm)
Maximum Pressure at Couplings		23 000 kPa (3,336 psi)
System Relief Pressure		
Loader		23 000 kPa (3,336 psi)
Steering		18 002 kPa (2,611 psi)
Hydraulic Cycle Time		
Raise		6.2 sec.
Dump		1.9 sec.
Lower (power down)		4.6 sec.
Total		12.7 sec.
Controls		3-function valve with single-lever control for boom and bucket, with hydraulic lockout feature; joystick-mounted push-button electrohydraulic (EH) control for auxiliary hydraulics, with hydraulic lockout feature; ride control electrically actuated for improved ride quality (factory and field option)
Cylinders		
Type		Heat-treated, chrome-plated, polished cylinder rods; hardened steel (replaceable bushings) pivot pins

## 304 G-TIER WHEEL LOADER SPECIFICATIONS

# 304

# G

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Electrical		304 G-TIER	
Type	Electrical load center with blade-type multi-fused circuits		
Voltage	12 volt		
Number of Batteries	1		
Battery Capacity	830 CCA		
Alternator Rating	80 amp		
Lights (SAE 99)	Driving/front working lights (2), rear working lights (2), turn signals, flashers, and stop- and taillights		
Operator's Station			
Noise Level (ISO 6396)			
Operator Ear	78 dba		
Bystander	101 dba		
Tires/Wheels			
Tires on Single-Piece Rims	Tread Width*	Width Over Tires†	Change in Vertical Height
405/70R20 Mitas EM-01 (standard)	1500 mm (4 ft. 11 in.)	1960 mm (6 ft. 5 in.)	—
400/70R20 Michelin XMCL (optional)	1500 mm (4 ft. 11 in.)	1960 mm (6 ft. 5 in.)	–6 mm (–0.24 in.)
405/70R18 Firestone Duraforce (optional)	1500 mm (4 ft. 11 in.)	1960 mm (6 ft. 5 in.)	–27 mm (–1.06 in.)
400/70R20 Nokian Hakkapeliitta Tri (optional)	1500 mm (4 ft. 11 in.)	1950 mm (6 ft. 5 in.)	–2 mm (–0.08 in.)
*Also see <b>J</b> in <b>Dimensions</b> section on pages 8 and 9. / †Also see <b>K</b> in <b>Dimensions</b> section on pages 8 and 9.			
Serviceability			
Refill Capacities		Refill Capacities (continued)	
Cooling System (engine and radiator)	10.0 L (10.6 qt.)	Fuel Tank	62.0 L (16.4 gal.)
Differential and Planetary Axle		Hydraulic/HST Reservoir	45.0 L (11.9 gal.)
Front	6.7 L (7.1 qt.)	With Filter	
Rear	6.7 L (7.1 qt.)	HST Motor Gearbox	1.0 L (1.1 qt.)
Engine Oil With Filter	7.4 L (7.8 qt.)		
Operating Weights			
With standard equipment, 405/70R20 tires, standard counterweight, 79-kg (175 lb.) operator, and full fuel tank			
	With Enclosed Cab	With Open ROPS	
Quik-Tatch™ Quick-Coupler			
With 0.8-m³ (1.0 cu. yd.) General-Purpose Bucket	5920 kg (13,051 lb.)	5870 kg (12,941 lb.)	
With Bolt-On Edge			
With 1.1-m³ (1.4 cu. yd.) General-Purpose Bucket	6030 kg (13,294 lb.)	5980 kg (13,184 lb.)	
With Bolt-On Edge			
With 1.6-m³ (2.1 cu. yd.) General-Purpose Bucket	6110 kg (13,470 lb.)	6060 kg (13,360 lb.)	
With Bolt-On Edge			
With Fork	5870 kg (12,941 lb.)	5820 kg (12,831 lb.)	
Hook/Euro Quick-Coupler			
With 0.8-m³ (1.0 cu. yd.) General-Purpose Bucket	5720 kg (12,610 lb.)	5670 kg (12,500 lb.)	
With Bolt-On Edge			
With 1.1-m³ (1.4 cu. yd.) General-Purpose Bucket	5840 kg (12,875 lb.)	5790 kg (12,765 lb.)	
With Bolt-On Edge			
With 1.6-m³ (2.1 cu. yd.) General-Purpose Bucket	5900 kg (13,007 lb.)	5850 kg (12,897 lb.)	
With Bolt-On Edge			
With Fork	5610 kg (12,368 lb.)	5560 kg (12,258 lb.)	
Optional Components			
Quik-Tatch Quick-Coupler			
With 0.8-m³ (1.0 cu. yd.) Bucket	405 kg (893 lb.)	405 kg (893 lb.)	
With 1.1-m³ (1.4 cu. yd.) Bucket	481 kg (1,061 lb.)	481 kg (1,061 lb.)	
With 1.6-m³ (2.1 cu. yd.) Bucket	584 kg (1,288 lb.)	584 kg (1,288 lb.)	
With Fork and 1.2-m (48 in.) Tines	328 kg (723 lb.)	328 kg (723 lb.)	
With Fork and 1.52-m (60 in.) Tines	357 kg (787 lb.)	357 kg (787 lb.)	
Hook/Euro Quick-Coupler			
With 0.8-m³ (1.0 cu. yd.) Bucket	337 kg (743 lb.)	337 kg (743 lb.)	
With 1.1-m³ (1.4 cu. yd.) Bucket	457 kg (1,008 lb.)	457 kg (1,008 lb.)	
With 1.6-m³ (2.1 cu. yd.) Bucket	520 kg (1,146 lb.)	520 kg (1,146 lb.)	
With Fork and Tines	235 kg (518 lb.)	235 kg (518 lb.)	



Dimensions and Specifications With Quik-Tatch Coupler and Bucket OR With Hook/Euro Quick-Coupler and Bucket			
304 G-TIER			
Dimensions With Quik-Tatch Coupler OR With Hook/Euro Quick-Coupler / With General-Purpose (GP) Bucket With Bolt-On Edge			
	0.8 m <sup>3</sup> (1.0 cu. yd.)	1.1 m <sup>3</sup> (1.4 cu. yd.)	1.6 m <sup>3</sup> (2.1 cu. yd.)
A Height to Top of Cab	2634 mm (8 ft. 8 in.)	2634 mm (8 ft. 8 in.)	2634 mm (8 ft. 8 in.)
A <sup>1</sup> Height to Top of Canopy	2610 mm (8 ft. 7 in.)	2610 mm (8 ft. 7 in.)	2610 mm (8 ft. 7 in.)
B Height to Top of Exhaust	1890 mm (6 ft. 2 in.)	1890 mm (6 ft. 2 in.)	1890 mm (6 ft. 2 in.)
C Ground Clearance	332 mm (13 in.)	332 mm (13 in.)	332 mm (13 in.)
D Length From Centerline to Front Axle	1070 mm (3 ft. 6 in.)	1070 mm (3 ft. 6 in.)	1070 mm (3 ft. 6 in.)
E Wheelbase	2150 mm (7 ft. 1 in.)	2150 mm (7 ft. 1 in.)	2150 mm (7 ft. 1 in.)
F Height to Hinge Pin, Fully Raised	3350 mm (11 ft. 0 in.)	3350 mm (11 ft. 0 in.)	3350 mm (11 ft. 0 in.)
G Maximum Rollback at Ground Level	42 deg.	42 deg.	42 deg.
H Maximum Rollback at Full Height	65 deg.	65 deg.	65 deg.
I Bucket Width	1.90 m (6 ft. 3 in.)	2.20 m (7 ft. 3 in.)	2.40 m (7 ft. 10 in.)
J Tread Width (standard) <sup>8</sup>	1500 mm (4 ft. 11 in.)	1500 mm (4 ft. 11 in.)	1500 mm (4 ft. 11 in.)
K Width Over Tires (standard) <sup>8</sup>	1960 mm (6 ft. 5 in.)	1960 mm (6 ft. 5 in.)	1960 mm (6 ft. 5 in.)
<sup>8</sup> Also see <b>Tires/Wheels</b> section on page 7.			
Dimensions With Quik-Tatch Coupler and GP Bucket With Bolt-On Edge			
L Overall Length, Bucket on Ground	5470 mm (17 ft. 11 in.)	5540 mm (18 ft. 2 in.)	5660 mm (18 ft. 7 in.)
M Dump Clearance, 40-deg. Full Height	2570 mm (8 ft. 5 in.)	2520 mm (8 ft. 3 in.)	2440 mm (8 ft. 0 in.)
N Reach, 40-deg. Dump, Full Height	941 mm (3 ft. 1 in.)	985 mm (3 ft. 3 in.)	1063 mm (3 ft. 6 in.)
O Maximum Reach, 42-deg. Dump	1680 mm (5 ft. 6 in.)	1720 mm (5 ft. 8 in.)	1800 mm (5 ft. 11 in.)
P Maximum Digging Depth	80 mm (3.0 in.)	80 mm (3.0 in.)	80 mm (3.0 in.)
Q Bucket Dump at Full Height	40 deg.	40 deg.	40 deg.
R Turning Circle Radius Over Outside of Bucket Edge	4350 mm (14 ft. 3 in.)	4510 mm (14 ft. 10 in.)	4640 mm (15 ft. 3 in.)
Specifications With Quik-Tatch Coupler and GP Bucket With Bolt-On Edge			
Capacity, Heaped, SAE	0.8 m <sup>3</sup> (1.1 cu. yd.)	1.1 m <sup>3</sup> (1.4 cu. yd.)	1.6 m <sup>3</sup> (2.1 cu. yd.)
Capacity, Struck, SAE	0.7 m <sup>3</sup> (0.9 cu. yd.)	0.9 m <sup>3</sup> (1.2 cu. yd.)	1.4 m <sup>3</sup> (1.8 cu. yd.)
Breakout Force, SAE J732C	5000 kg (11,023 lb.)	4580 kg (10,097 lb.)	3870 kg (8,532 lb.)
Tipping Load, Straight	3990 kg (8,796 lb.)	3860 kg (8,510 lb.)	3730 kg (8,223 lb.)
Tipping Load, Full Turn, SAE	3520 kg (7,760 lb.)	3410 kg (7,518 lb.)	3300 kg (7,275 lb.)
Rated Operating Load, 50% of Full-Turn Tipping Load (conforms to ISO 14397-1)*	1760 kg (3,880 lb.)	1705 kg (3,759 lb.)	1650 kg (3,638 lb.)
*Rated operating capacity based on Deere attachments only.			
Dimensions With Hook/Euro Quick-Coupler and GP Bucket With Bolt-On Edge			
L Overall Length, Bucket on Ground	5350 mm (17 ft. 7 in.)	5410 mm (17 ft. 9 in.)	5530 mm (18 ft. 2 in.)
M Dump Clearance, 40-deg. Full Height	2620 mm (8 ft. 7 in.)	2570 mm (8 ft. 5 in.)	2480 mm (8 ft. 2 in.)
N Reach, 40-deg. Dump, Full Height	801 mm (32 in.)	843 mm (33 in.)	864 mm (34 in.)
O Maximum Reach, 42-deg. Dump	1590 mm (5 ft. 3 in.)	1630 mm (5 ft. 4 in.)	1660 mm (5 ft. 5 in.)
P Maximum Digging Depth	75 mm (3 in.)	75 mm (3 in.)	125 mm (5 in.)
Q Maximum Bucket Dump Angle, Fully Raised	42 deg.	42 deg.	42 deg.
R Turning Circle Radius Over Outside of Bucket Edge	4310 mm (14 ft. 2 in.)	4465 mm (14 ft. 8 in.)	4600 mm (15 ft. 1 in.)
Specifications With Hook/Euro Quick-Coupler and GP Bucket With Bolt-On Edge			
Capacity, Heaped, SAE	0.8 m <sup>3</sup> (1.1 cu. yd.)	1.1 m <sup>3</sup> (1.4 cu. yd.)	1.6 m <sup>3</sup> (2.1 cu. yd.)
Capacity, Struck, SAE	0.7 m <sup>3</sup> (0.9 cu. yd.)	0.9 m <sup>3</sup> (1.2 cu. yd.)	1.3 m <sup>3</sup> (1.7 cu. yd.)
Breakout Force, SAE J732C	6220 kg (13,713 lb.)	5810 kg (12,809 lb.)	5000 kg (11,023 lb.)
Tipping Load, Straight	4440 kg (9,789 lb.)	4300 kg (9,480 lb.)	4190 kg (9,237 lb.)
Tipping Load, Full Turn, SAE	3920 kg (8,642 lb.)	3800 kg (8,378 lb.)	3700 kg (8,157 lb.)
Rated Operating Load, 50% of Full-Turn Tipping Load (conforms to ISO 14397-1)*	1960 kg (4,321 lb.)	1900 kg (4,189 lb.)	1850 kg (4,079 lb.)
*Rated operating capacity based on Deere attachments only.			


While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

## 304 G-TIER


### Dimensions and Specifications With Quik-Tatch Coupler and Bucket OR With Hook/Euro Quick-Coupler and Bucket (continued)

#### 304 G-TIER

#### 304 G-TIER LOADER WITH CAB, QUIK-TATCH COUPLER OR HOOK/EURO QUICK-COUPLER, AND BUCKET

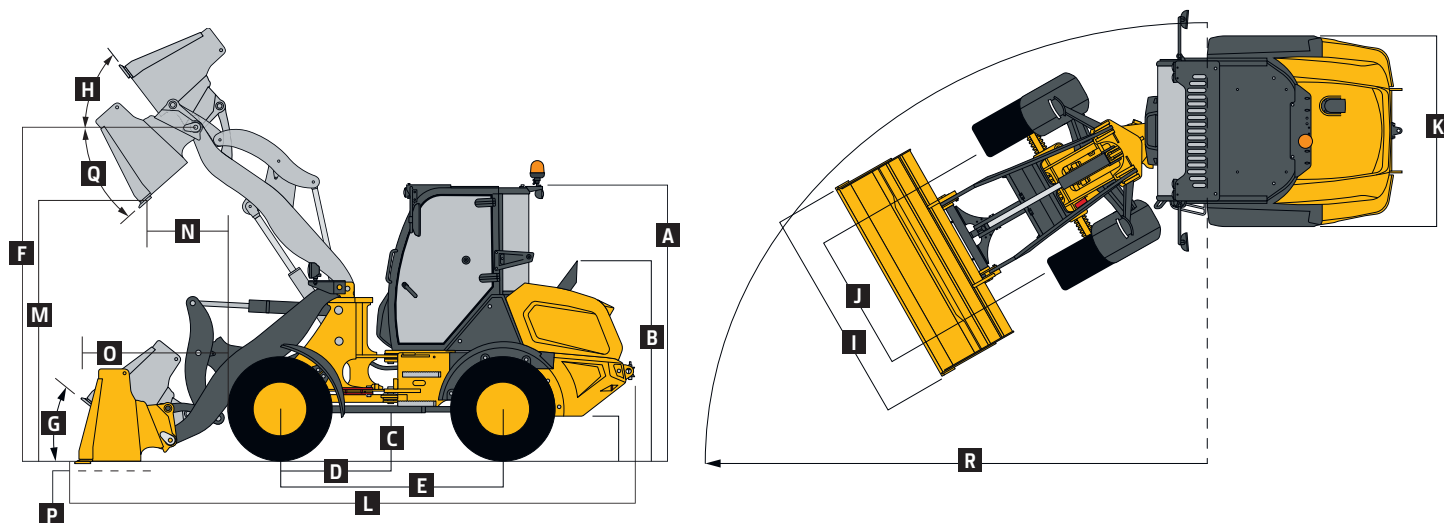

#### 304 G-TIER LOADER WITH CANOPY, QUIK-TATCH COUPLER OR HOOK/EURO QUICK-COUPLER, AND BUCKET

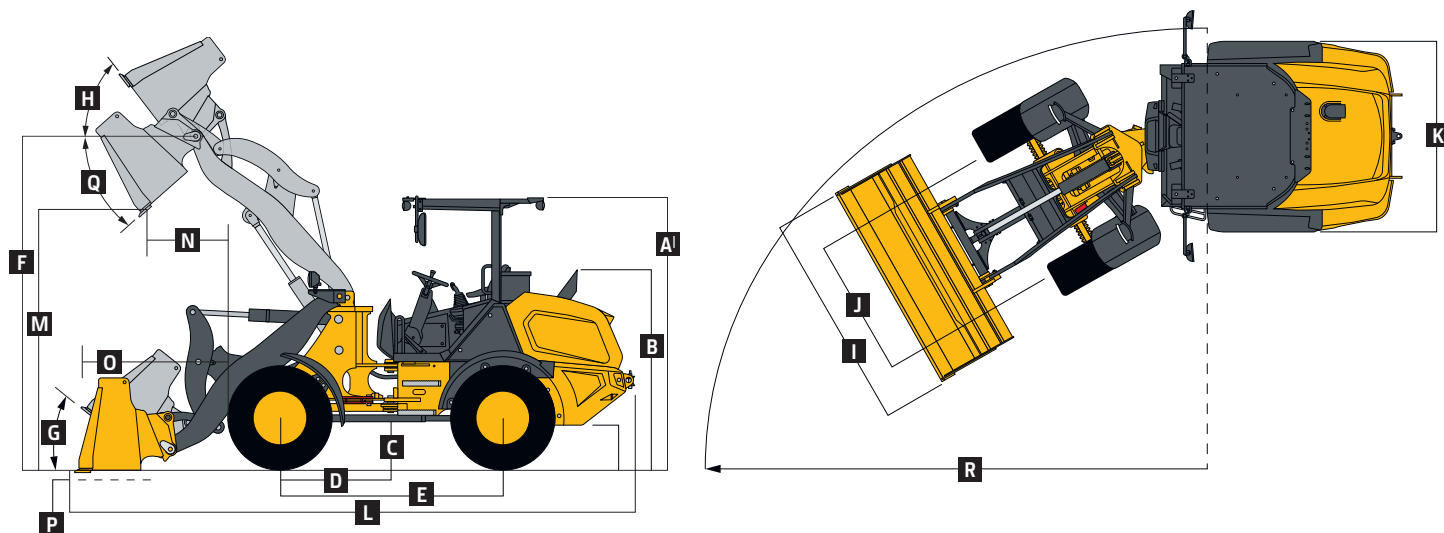

# 304 G-TIER

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.


## Dimensions and Specifications With Quik-Tatch Coupler and Fork OR With Hook/Euro Quick-Coupler and Fork

### 304 G-TIER


Dimensions With Fork	Quik-Tatch Coupler and 1.2-m (48 in.) tine length	Quik-Tatch Coupler and 1.52-m (60 in.) tine length	Hook/Euro Quick-Coupler and 1.2-m (48 in.) tine length
A Height to Top of Cab	2634 mm (8 ft. 8 in.)	2634 mm (8 ft. 8 in.)	2634 mm (8 ft. 8 in.)
A' Height to Top of Canopy	2610 mm (8 ft. 7 in.)	2610 mm (8 ft. 7 in.)	2610 mm (8 ft. 7 in.)
B Height to Top of Exhaust	1890 mm (6 ft. 2 in.)	1890 mm (6 ft. 2 in.)	1890 mm (6 ft. 2 in.)
C Ground Clearance	332 mm (13 in.)	332 mm (13 in.)	332 mm (13 in.)
D Length From Centerline to Front Axle	1070 mm (3 ft. 6 in.)	1070 mm (3 ft. 6 in.)	1070 mm (3 ft. 6 in.)
E Wheelbase	2150 mm (7 ft. 1 in.)	2150 mm (7 ft. 1 in.)	2150 mm (7 ft. 1 in.)
F Overall Length, Forks on Ground	6070 mm (19 ft. 11 in.)	6350 mm (20 ft. 10 in.)	5940 mm (19 ft. 6 in.)
G Height to Hinge Pin, Fully Raised	3350 mm (11 ft. 0 in.)	3350 mm (11 ft. 0 in.)	3350 mm (11 ft. 0 in.)
H Reach, Fully Raised	634 mm (25 in.)	634 mm (25 in.)	553 mm (22 in.)
I Fork Height, Fully Raised	3160 mm (10 ft. 4 in.)	3160 mm (10 ft. 4 in.)	3180 mm (10 ft. 5 in.)
J Maximum Reach, Fork Level	1400 mm (4 ft. 7 in.)	1400 mm (4 ft. 7 in.)	1310 mm (4 ft. 4 in.)
K Fork Height, Maximum Reach	1450 mm (4 ft. 9 in.)	1450 mm (4 ft. 9 in.)	1470 mm (4 ft. 10 in.)
L Reach, Ground Level	930 mm (3 ft. 1 in.)	930 mm (3 ft. 1 in.)	822 mm (32 in.)
M Tine Length	1219 mm (48 in.)	1524 mm (60 in.)	1200 mm (48 in.)
N Load Position, 50% Tine Length	600 mm (24 in.)	760 mm (30 in.)	600 mm (24 in.)
<b>Specifications With Fork</b>	<i>As measured with fork level, centered on tine</i>		
Tipping Load, Straight	3180 kg (7,011 lb.)	3180 kg (7,011 lb.)	3500 kg (7,716 lb.)
Tipping Load, Full Turn, SAE	2800 kg (6,173 lb.)	2800 kg (6,173 lb.)	3100 kg (6,834 lb.)
Rated Operating Load, 50% Full-Turn Tipping Load (conforms to SAE J1197 / ISO 14397-1)*	1400 kg (3,086 lb.)†	1400 kg (3,086 lb.)†	1550 kg (3,417 lb.)†
Rated Operating Load, Rough Terrain, 60% Full-Turn Tipping Load (conforms to EN474-3)*	1680 kg (3,704 lb.)†	1680 kg (3,704 lb.)†	1850 kg (4,101 lb.)†
Rated Operating Load, Firm and Level Ground, 80% Full-Turn Tipping Load (conforms to EN474-3)*	2240 kg (4,938 lb.)†	2240 kg (4,938 lb.)†	2480 kg (5,467 lb.)†

\*Rated operating capacity based on Deere attachments only. / †Payload on forks is limited by tilt cylinder.

### 304 G-TIER LOADER WITH CAB, QUIK-TATCH COUPLER OR HOOK/EURO QUICK-COUPLER, AND FORK

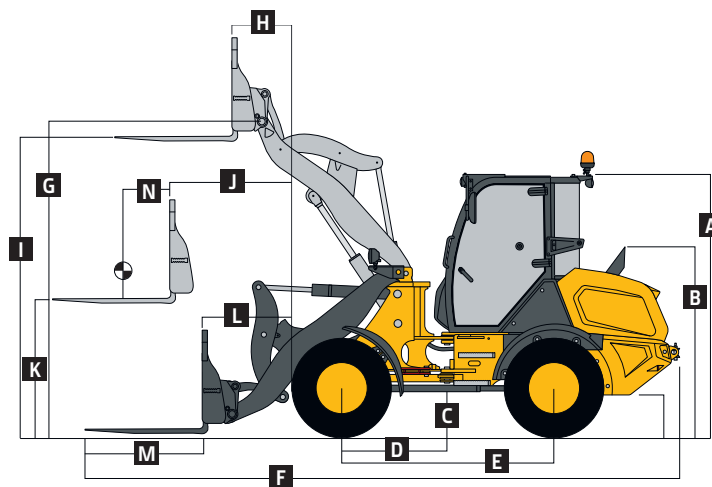

### 304 G-TIER LOADER WITH CANOPY, QUIK-TATCH COUPLER OR HOOK/EURO QUICK-COUPLER, AND FORK


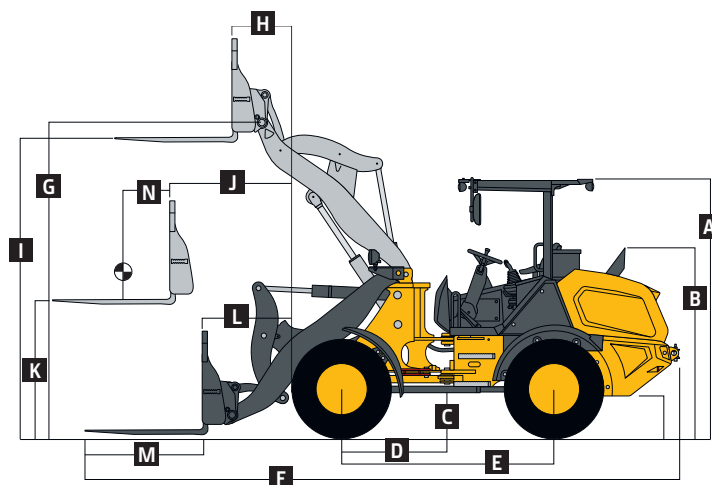


While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

## 304 G-TIER

### Bucket Selection Guide\*

LOOSE MATERIALS	kg/m <sup>3</sup>	lb./cu. yd.	LOOSE MATERIALS	kg/m <sup>3</sup>	lb./cu. yd.
Chips, pulwood	288	486	Limestone, coarse, sized	1570	2,646
Cinders (coal, ashes, clinkers)	673	1,134	Limestone, mixed sizes	1682	2,835
Clay and gravel, dry	1602	2,700	Limestone, pulverized or crushed	1862	2,995
Clay compact, solid	1746	2,943	Sand, damp	2083	3,510
Clay, dry in lump loose	1009	1,701	Sand, dry	1762	2,970
Clay, excavated in water	1282	2,160	Sand, voids, full of water	2083	3,510
Coal, anthracite, broken, loose	865	1,458	Sandstone, quarried	1934	2,214
Coal, bituminous, moderately wet	801	1,350	Shale, broken crushed	1962	2,295
Earth, common loam, dry	1318	2,252	Shag, furnace-granulated	1935	3,294
Earth, mud, packed	1843	3,105	Stone or gravel, 37.5 to 87.5 mm	1642	2,430
Granite, broken	1538	2,592	(1.5 to 3.5 in.) size	1602	2,700
Gypsum	2275	3,834	Stone or gravel, 80.75 mm (3.15 in.) size		

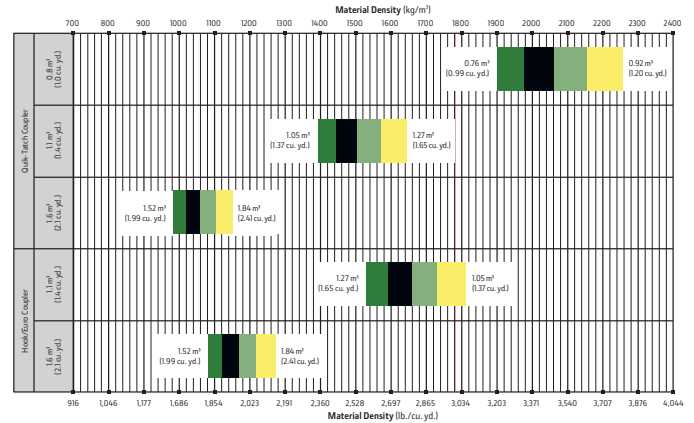

# Additional equipment

Key: ● Standard ▲ Optional or special

See your John Deere dealer for further information.

### 304 G Engine

- Antifreeze, -37 deg. C (-34 deg. F)
- Coolant recovery tank
- Fan safety guard
- Fan, sucker type, direct drive
- Under-hood aftertreatment (including diesel oxidation catalyst and diesel particulate filter)
- Environmentally friendly engine oil drain
- Engine oil cooler
- Quick-release fuel filter and water separator
- Automatic engine glow plugs for cold start
- ▲ Engine coolant heater, 1,000 watts, 110 volts

### Electrical

- Starter switch with electric fuel cutoff
- 12-volt system
- Electrical load center: Blade-type fuses
- Standard battery (1), 12 volt with 830 CCA
- Master electrical disconnect switch
- Alternator, 12 volts, 80 amps
- Horn (conforms to SAE J994 / J1446)
- Lights (conform to SAE 99): Driving / Turn signals / Flashers / Stop / Taillights
- Worklights, front (2)
- Worklights, rear (2)
- Reverse warning alarm (conforms to SAE J994 / J1446)
- Multifunction monitor with audible and visual warnings: Engine coolant temperature and hydraulic oil temperature / Gauge: Fuel / Visual indicators: Air-filter restriction, low voltage, coolant temperature, engine oil pressure, engine preheat, engine rpm, hydraulic bucket return-to-dig control, hydraulic oil temperature, lights high beam, park brake, turn signals, fuel-level gauge, and hour meter

### 304 G Electrical (continued)

- Indicator lights: Engine air filter / Battery voltage / Parking brake actuated / Forward/reverse travel / 1st- or 2nd-speed range / Turn signal and hazard lights / High-beam driving lights
- Radio-ready cab, fus'd 12-volt radio electrical lead and speakers, power port
- Pre-wired for roof beacon

### Powertrain/Brakes

- Hydrostatic (HST) transmission: Electric shift control / Single-lever joystick F-N-R / Hydrostatic oil cooler / Inching pedal / 2 speeds forward and reverse / Infinitely variable speed control
- Parking brake, spring applied, hydraulically released, switch operated
- 45% limited-slip front and rear differentials

### Hydraulic System

- Hydraulic system oil cooler
- Float detent
- Reservoir sight gauge
- Fine-micron hydraulic filters, vertical mounting
- Hydraulic function lockout
- 3-function hydraulic valve with electro-hydraulic push-button 3rd-function control
- Quick-coupler diagnostic ports: Priority pressure / Hydraulic pump pressure / Control valve pressure / HST pressure

### Operator's Station

- ▲ Cab (conforms to SAE J1040, SAE J231, ISO 3471, and ISO 3449): Air conditioner/heater/defroster / Tilt steering / Inside mirror
- Canopy
- Storage compartment for operator's manual and other items
- Rubber floor mat
- Rearview mirrors, outside (2)

### 304 G Operator's Station (continued)

- Handholds and steps, ergonomically located and slip resistant (conform to SAE J185)
- Loader Linkage
  - Z-bar loader linkage provides high bucket breakout
- Loader boom service locking bar (conforms to SAE J38)
- Buckets and Attachments
  - ▲ Full line of buckets with selection of bolt-on cutting edges
  - ▲ Electrically actuated quick-coupler with flags
  - ▲ Full line of construction utility forks, pallet forks, and other attachments\*
  - ▲ ISO parallel-pin hydraulically actuated coupler
- Tires
  - 405/70R20 Mitas EM-01
  - ▲ 400/70R20 Michelin XMCL
  - ▲ 405/70R18 Firestone Duraforce
  - ▲ 400/70R20 Nokian Hakkapeliitta Tri
- Other
  - Fenders, front and rear
  - Articulation locking bar (conforms to SAE J276)
  - Vandal protection, includes lockable engine enclosure
  - Counterweight, saddle-type, built-in
  - Rear bottom guard, built-in
  - Drawbar, with locking pin
  - Lift eyes
  - Tie-downs
  - ▲ Fire extinguisher
  - ▲ Material-weighing system†
  - ▲ Ride control
  - ▲ Creep control
  - ▲ JDLINK™ wireless communication system (available in specific countries; see your dealer for details)

\*See your John Deere dealer for further information.

†Contact LOAD-RITE™.

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at test conditions specified per ISO 9249. No derating is required up to 3000-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with all standard equipment, ROPS cab, standard rear counterweight, 405/70R20 tires, full fuel tank, and 79-kg (175 lb.) operator.